


As you can see from the [AMI FAMILY MAP](#), there are a number of variations of the AMI-300. If your laboratory's needs fall more toward single workstation operations, the AMI-300 is the logical choice. However, if you require increased throughput with the same degree of automation as the AMI-300, there are two, three, five and eight workstation versions of the AMI-300 available. As noted above, additional workstations can be added to an AMI-300 in the future.

If your needs fall more toward reaction experiments such as steam reforming, water-gas shift, auto thermal reforming, or preferential oxidation reactions, the AMI-300R is available with one or more liquid pumps and vaporizers to efficiently study those kinds of reactions. If you need to study reactions under pressure, the AMI-300R (HP) can be operated with pressures up to 50 bar (and higher on a custom instrument).

If your needs fall more toward a less costly line of instruments, the AMI-90, and the three, five, and eight station versions provide all of the traditional catalyst testing capabilities on a budget-conscious basis.

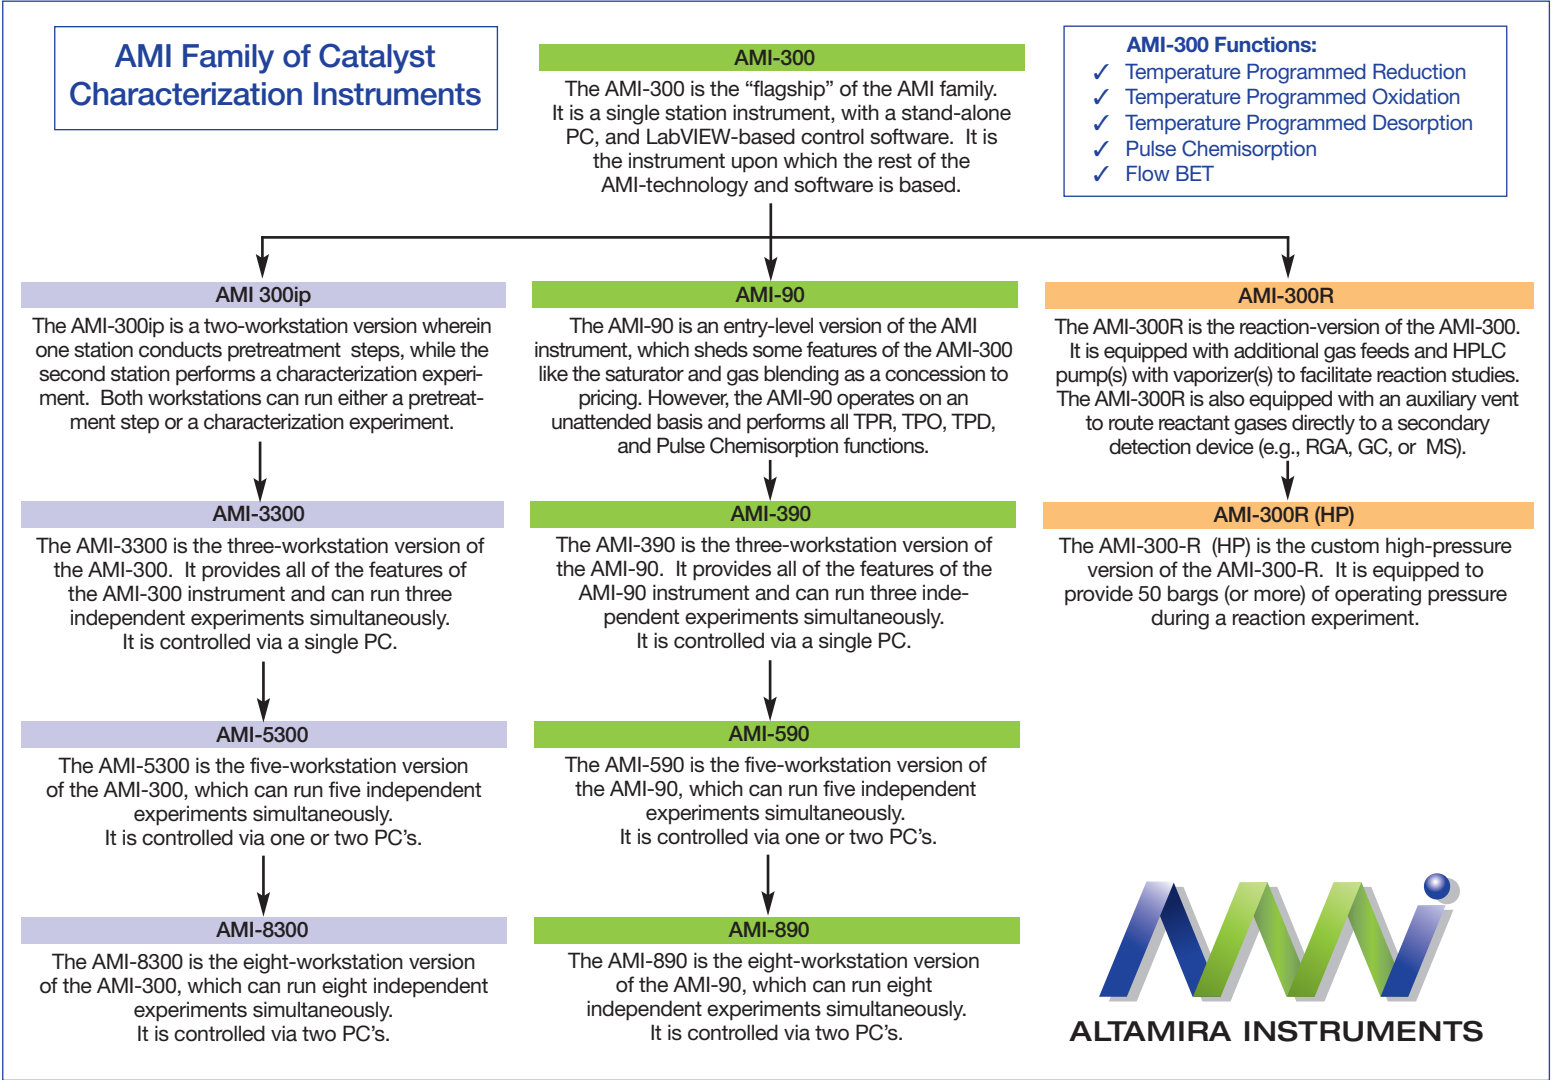

Dynamic Chemisorption and the AMI-300

The AMI-300 is the latest generation automated chemisorption analysis instrument offered by Altamira Instruments. Developed by and for catalyst researchers, it and its predecessors, the AMI-1, AMI-100, and the AMI-200, were first in the industry to offer a fully automated system capable of performing all the major dynamic techniques required for fully characterizing a catalyst. The AMI-300 utilizes our proven technology for performing the following dynamic procedures:


- Temperature programmed desorption (TPD)
- Temperature programmed reduction/oxidation (TPR/O)
- Temperature programmed reaction (TPRx)
- Pulse chemisorption
- Catalyst treatment
- Flow BET surface area
- Pulse calibration

Up to 99 procedures can be linked together consecutively to provide a complete characterization experiment. All experimental procedures can be designed and stored for easy retrieval.

Hardware and Operation

The AMI-300 is a fully automated catalyst characterization instrument wherein the LabVIEW-based software is used to switch gas streams, control gas flow rates, blend gases, control temperatures, control ramp rates, and to collect all the data needed to quantify the adsorption and desorption of gas molecules on the surface of a catalyst. Features of the AMI-300 include:

- High-precision electronic mass flow controllers, which ensure a stable baseline with changing temperatures and also ensure quality of data
- Use of 1/16" stainless steel tubing to minimize dead volume and reduce peak spreading
- A clamshell furnace with adjustable mounting to ease insertion and removal of samples
- Capability of heating catalyst samples to 1200°C with linear temperature ramps from 1°C to 30°C per minute. (Higher and lower ramp rates are also available.)
- A subambient option which provides the capability to operate linearly, between -100°C and 1200°C
- Automatic air-cooling of the furnace which is provided to speed the time between experiments
- A Universal Temperature Zone which controls the temperature of all valves and lines downstream of the reactor. The temperature of this zone is controlled by the software and serves to prevent both condensation and retention of the adsorbate in valves and lines upstream of the detector.
- A saturator is provided as standard equipment to suffuse the treatment gas with liquid vapors. The temperature of the saturator is controlled by the software. In applications where condensation of liquid vapors in the line between the saturator and the Universal Temperature Zone is a concern, a reflux heater is available to ensure that no condensation takes place.
- A highly linear Thermal Conductivity Detector (TCD) is standard. The resolution of the TCD is operator defined, and is controlled by the software.
- A choice of TCD filaments is offered to maximize sensitivity and chemical compatibility of the instrument

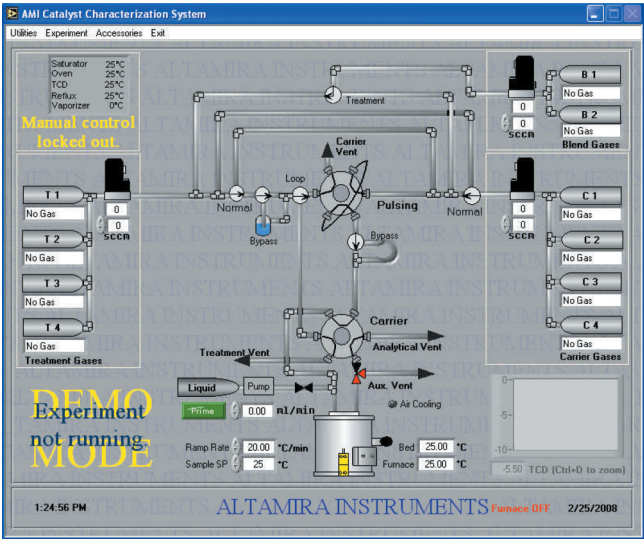

Operating Screen — A complete overview of all experimental parameters.

Computer Control and Data Acquisition

The AMI-300 is fully automated and computer-controlled for ease of operation and reliability. It is designed so that experiments can be run on an unattended basis. This PC, supplied with a Windows based operating system, can be networked and is capable of managing other laboratory tasks in addition to operation of the instrument.

The control and data acquisition functions are performed by LabVIEW applications software. Using this software, a complete experiment can be set-up in minutes, and it can be saved for future use or modification.

The control portion of the software controls and regulates all valve positions, temperatures, flow rates, and detector parameters. The software also allows for the use of an alarm matrix. Data acquisition occurs at a selected rate for optimum performance. An “Overview” screen shows the status of the unit at a glance, providing information on the position of all valves, type of gas connected to each port, temperatures, and detector signal. Lines change color to illustrate the current flow path. In manual mode any valve can be switched just by a click of the mouse on its icon. Gas flow and temperature setpoints can be entered from this screen.


The most sophisticated data handling package in the industry is included which allows the user to display and integrate signal peaks, calculate chemisorptive parameters, peak fit, and overlay data.

Choice of Detectors

The AMI-300 comes standard with a highly linear TCD. In addition to the TCD, AMI instruments have been delivered with a wide range of auxiliary detection devices. Choices of auxiliary detectors have included:

- Mass Spectrometer
- GC
- Flame Ionization Detector
- FTIR

Any detector that provides an analog output or which can communicate through DDE, Serial ports, OPC, ActiveX, or other Windows protocols can be triggered by the AMI-300. The degree to which the auxiliary detection device is to be integrated with the instrument can be specified and incorporated into the control software.

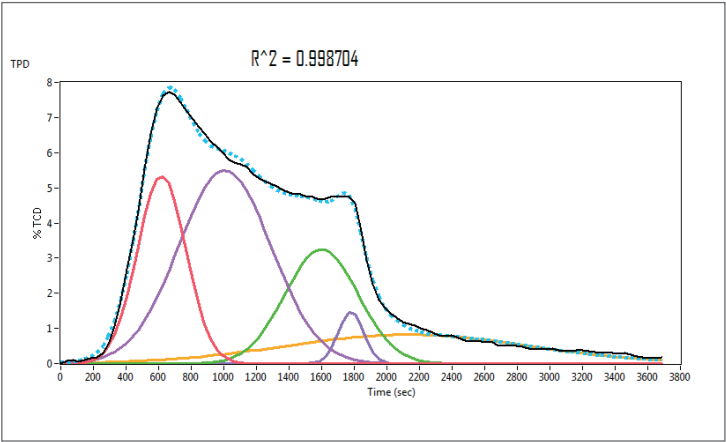

Deconvolution of hydrogen TPD from a 64% Ni/SiO2 catalyst. Different peaks correspond to different adsorbed species

Gas Blending Capabilities

The AMI-300 comes standard with **gas blending capabilities** that avoid any need to purchase expensive gas blends to conduct experiments such as TPR or TPO. The AMI-300 includes an auxiliary gas line by means of which a third gas can be mixed with the carrier gas to provide **custom-blended gases**. An in-line static gas mixer assures homogeneity of the resulting blend.

The gas blending capability also facilitates the use of the AMI-300 as a **gas-phase, atmospheric reactor**.

Our Expertise

Altamira Instruments was founded by catalyst researchers. We understand your requirements. Our experts are available to answer your questions and help in your applications.

Our strength lies in being able to customize a system to meet your exact needs. Examples of some of Altamira’s instrument customizations include:

- Additional gas feed(s)
- Corrosive service package
- High pressure characterization
- Methanizer, incorporated with FID
- Multiple Workstations
- Sulfur-tolerant instruments
- Auxiliary pretreatment station
- Fast switching gas feeds
- Integrated pretreatment station
- Multiple detection devices
- Oxygen Storage Capacity (OSC)
- Vaporized liquid feed(s)

Specifications:

- Catalyst Charge: 0.1 – 1.0 grams
- Temperature Range: -100°C to +1200°C with Subambient Option
- 30°C/minute standard
- Operating Pressure: Atmospheric
- Gases: 4 carrier, 4 treatment, 2 blend (Others Available)
- Gas Flow Rates: 5 to 50 sccm (Others Available)
- Reactor Types: Quartz U-tubes, Bubble Tubes, Monolith Tubes (up to 1" diameter)
- Primary Detectors: 4 filament TCD with choice of material (W, Au/W)
- Materials of Construction: Flow path: 316 stainless steel
- Seals: Viton, Buna-N, or Premium Seals (depending on customer chemical compatibility requirements)
- Dimensions: 56 cm (W), 60 cm (H), 61 cm (D)
- Weight: approximately 55 kg (120 lbs)
- Power Requirements: 110-120 or 220-240 Volts, single phase, 50 or 60 Hz. 15 amp service